




## bwz-Wedge Supports - Selection

available in design


free standing (FS) – with upper and lower plates

bolt on (BO) - with lower plate and inside thread

bolt through (BT) - with lower board and bore hole for floor anchor




Dimensions in mm

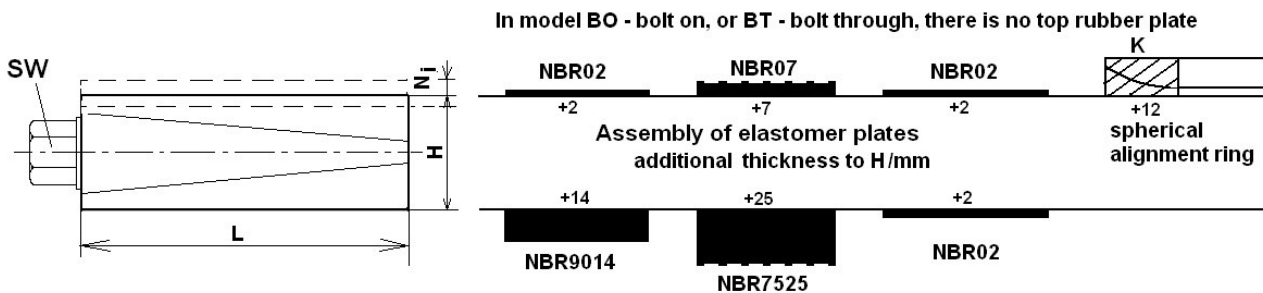

Complete the basic model with plate type as drawn bevor and add this to high H

Basic Model	Variant either/or	L	B	H	Ni	SW a/i	Weight kg
FK 01	FS	105	55	36	6	17/8	1,20
FK 03	FS	150	75	37	7	19/9	2,56
FK 04	FS/BO/BT	115	115	40	9	19/9	2,68
FK 05	FS/BO/BT	125	125	38	9	19/9	3,40
FK 06	FS	200	95	48	12	24/14	5,08
FK 07	FS/BO/BT	150	150	49	12	22/12	5,46
FK 10	FS/BO/BT	200	200	46	10	24/14	10,10



Hole Positions  
for Variant BO and BT

Model	c	d	Threat	Diam.
FK04	50	24	M16	18
FK05	50	20	M16	18
FK07	60	23	M16	18
FK10	75	27,5	M20	22

Dimensions and Load table

Model	L	B	H	Ni	SW a/i	Weight kg	Load daN	With plates Load daN	With plates Load daN		
FK 01	105	55	36	6	17/8	1,20	Without plates 2000 4000 4600 5500 6500 7800 14000	NBR014/NBR02 or NBR02/NBR02 for high damping and level stability	2000 4000 4600 5500 6500 7800 14000		
FK 03	150	75	37	7	19/9	2,56					
FK 04	115	115	40	9	19/9	2,68					
FK 05	125	125	38	9	19/9	3,40					
FK 06	200	95	48	12	24/14	5,08					
FK 07	150	150	49	12	22/12	5,46					
FK 10	200	200	46	10	24/14	10,10					
										NBR7525/NBR07 for efficient antivibration	650 1100 1300 1600 1900 2300 4000

The article description consist in

Model-No. / FS, BO or BT-design / lower plate / upper plate or calotte

Optionally offer

Accessories for BO: screw, nut and washer, for BT: screw, dowel, screw head insulating disk and nut